


TT30PI

Code: TAGLTT30PI

CUTTING

IDEAL FOR LOW PRESSURE
AND TEXTILE HOSES UP TO 5/8"

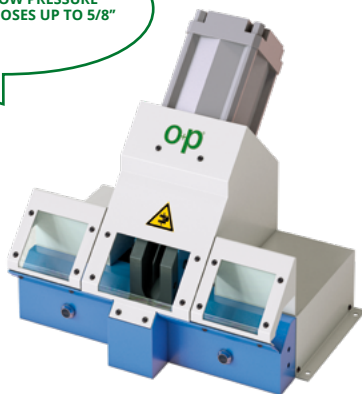

MAIN FEATURES




Pneumatic input



Safety protections


TECHNICAL DATA	
TT30PI	
MAX Ø (OD)	1.1"
DIMENSIONS LxWxH	17.3"x 18.3"x16.9"
WEIGHT	66 Lbs

ACCESSORIES		
		TT30PI
PEDAL		■
MEASURING HOSE HOLDER		■

CUTTING BLADES

CUTTING

TECHNICAL DATA
DIMENSIONS mm (EXT Ø X W X INT. Ø)
SMOOTH AND TOOTHED CUTTING BLADES*
Ø 200 x 2.5 x 32
Ø 250 x 3 x 40 (TF2, TF2/E, TF1/E)
Ø 275 x 3 x 40
Ø 300 x 3 x 50
Ø 350 x 3 x 50 (TF3/E)
Ø 400 x 4 x 50 (TF4, TF4/E, TF3, TF3 PI)
Ø 520 x 4 x 50 (TUBOCUT5, TF5, TF5ECO)
Ø 650 x 6 x 80 (TF6)
*Smooth blades available upon request

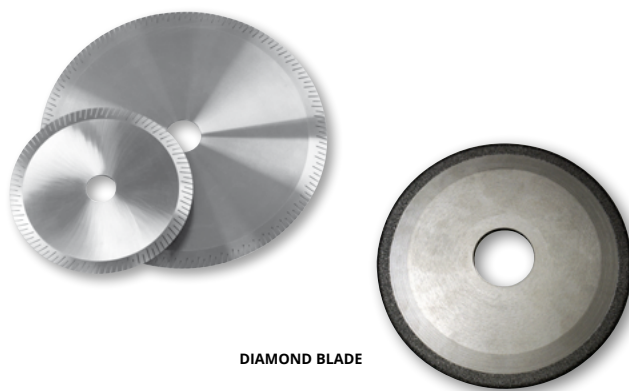

DIAMOND BLADES

Diamond blades for special applications.

Available Ø: 200, 250, 275, 300, 350, 400, 520, 650 mm.

They are ideal for cutting steel spiral hoses type SAE 100R4, that are hardwall smooth rubber hoses suitable for suction and delivery of hydraulic fluids, mineral oil and fuels.

They can be also used for cutting reinforced hoses with a single steel wire spiral with high strength synthetic textile plies.